

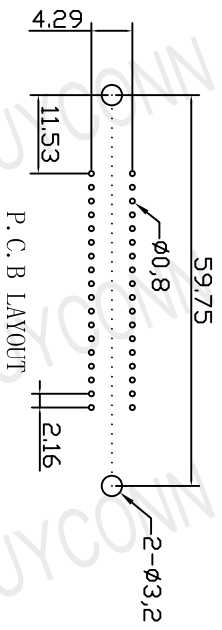
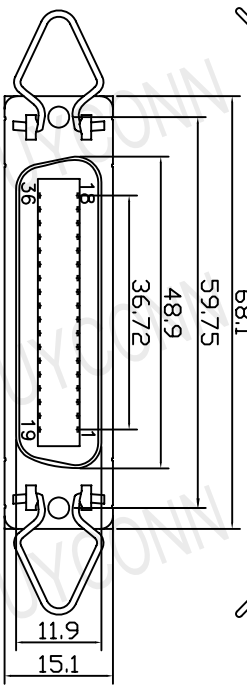


REV	DATE	DESCRIPTION
A	2009-5-30	

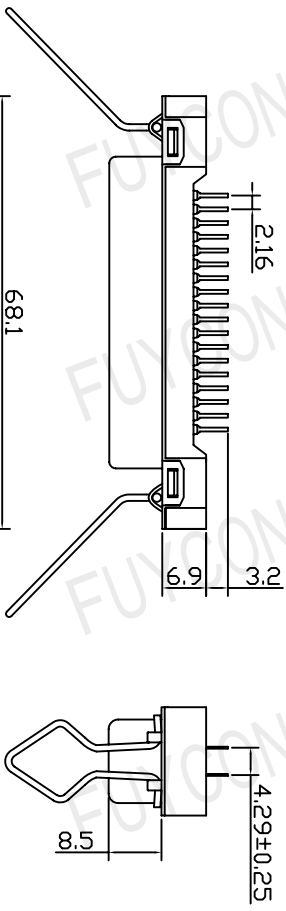

Material & finish
 SHELL:
 steel Zinc plated, Tin plated
 or Nickel plated steel
 PIN CONTACT:
 Phosphor bronze or brass
 Gold Plated
 INSULATOR:
 PBT & Glass-fibre reinforced
 UL-94-V0
 CURRENT RATING:5Amp
 DIELECTRIC STRENGTH:
 1000V for one minute
 INSULATOR RESISTANCE:
 1000MΩ MIN.(at 500V DC)
 CONTACT RESISTANCE:25mΩ Max. mated
 TEMPERATURE:
 -55°C to +105°C

57RS 36 S * A * 062
 FILE NO:001-1000
 CONTACT LENGTH:MM: A:2.6 B:3.7 C:2.8 D:3.0 E:3.2 F:4.75 O:N/A
 SHELL: A: NICKEL PLATED
 CONTACT PLATING: A:GOLD FLASH B:3U" C:3U" D:10U" E:15U" F:30U"
 INSULATOR COLOR: B:BLUE K:BLACK
 CONTACT TYPE: P:PLUG S:SOCKET
 NO OF CONTACTS: 14 24 36 50



UNIT : mm

FUYCONN 东莞市复禹电子有限公司 DONG GUAN FUYCONN ELECTRONICS CO., LTD		MODEL NAME: 57-180度36S母平面新型凸 四角勾耳	
SELECT	1	2	3
DIM TOL	0.05	0.05	0.10
	0.10	0.15	0.20
	0.15	0.25	0.30
ANGLE	0.25	0.30	0.40
	1.0°	3.0°	5.0°
PART NO.	57RS36S**A*062		FILE NO. FUY57062
APPROVED BY:			SCALE:
CHECKED BY:			DATE : 2009-5-30
DRAW BY:	周胤璇		